

CD1

12–24VDC Powered Ignition System

- Applies to 1-8 cylinder engines
- Low-cost industrial system
- Capacitor-discharge, high-energy spark
- Accurate timing - crankshaft-referenced
- No moving parts - eliminates distributor
- 12-24VDC powered
- Built-in diagnostics

CD1 is a capacitor-discharge, electronic microcircuit-based ignition system for small 1 to 8 cylinder industrial engines. The system, powered from 12-24VDC, has no moving parts. Step-up coils, either individual (one per cylinder) or a multi-tower coil module (one serving 4 or 6 cylinders) are used to eliminate the conventional high-tension distributor.


Employing digital circuitry, the CD1 unit processes signals from a magnetic pickup, sensing drilled reference holes or protrusions. This provides accurate and consistent timing referenced directly to the engine's crankshaft or camshaft. The CD1 uses the high energy, capacitor discharge (C.D.) principle which provides maximum engine performance and can extend spark plug life three to five times compared to an inductive system.

The CD1 system can be applied in either single-firing or double-firing (exhaust stroke firing) modes. Four CD1 units are offered having 3, 4, 6 or 8 outputs:

- 791010-3 for 1 to 6 cylinder engines, double-firing system
- 791010-4 for 1 to 8 cylinder engines, double-firing system
- 791010-6 for 3 to 6 cylinder engines, single-firing system
- 791010-8 for 4 to 8 cylinder engines, single-firing system

All operate from either 12 or 24VDC keeping stocking requirements to a minimum. Indicating LED's quickly convey whether proper pickup signals are being received and if the corresponding output signals are correct.

The low cost CD1 system brings the quality and benefits of an industrial, capacitor-discharge ignition to small engine users.

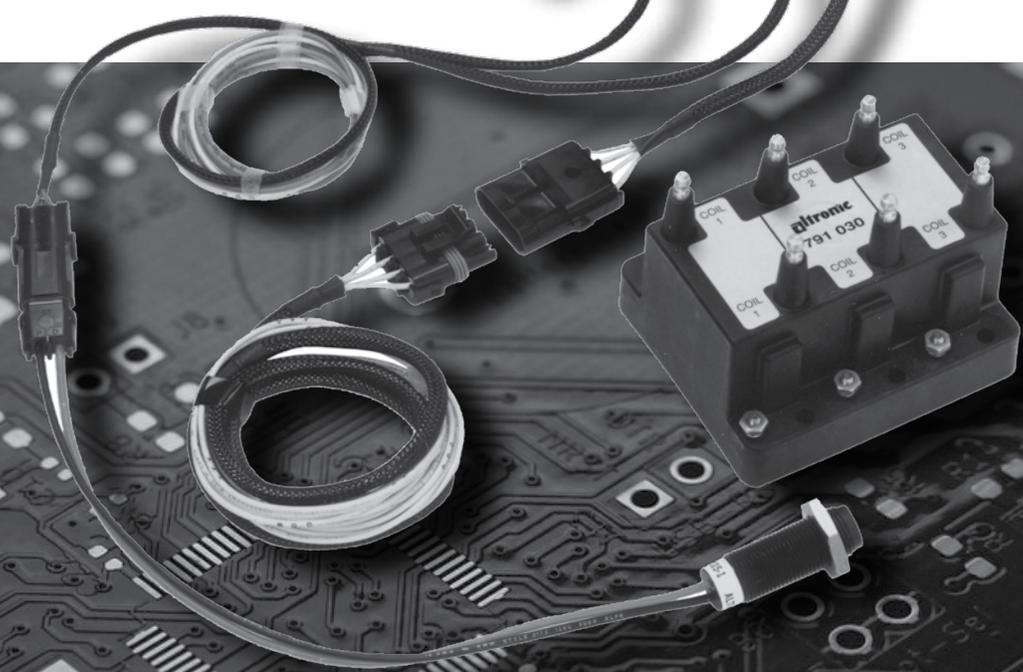

CD1 System

CD1 COMPONENTS


| PART NO. | DESCRIPTION |
|----------|---|
| 791010-3 | CD1 unit, 3 output* |
| 791010-4 | CD1 unit, 4 output |
| 791010-6 | CD1 unit, 6 output |
| 791010-8 | CD1 unit, 8 output |
| 791015-1 | Magnetic pickup, 3/4-16 x 1.9" |
| 791016-2 | Magnetic pickup, 3/4-16 x 3.4" |
| 793035-1 | Harness, 3 output, 72" |
| 793039-1 | Harness, 4 output, 72" |
| 793048-6 | Harness, 6 output, 72" |
| 793048-8 | Harness, 8 output, 72" |
| 501061 | Ignition coil, blue (use with all units) |
| 591040 | Ignition coil, black (use with all units) |

NOTE: Use unit 791010-4 in place of 791010-3 where a C.D. ignition shutdown lead is desired.


Specifications

- No. of cylinders..... 1-8
- Power required 12VDC, 1.0Amp
24VDC, 0.5Amp
- Max. voltage output 40KV
- Spark duration..... 300-600 microsec.
- Timing adjustment..... 8-position switch

CD1 System, 4-Cylinder

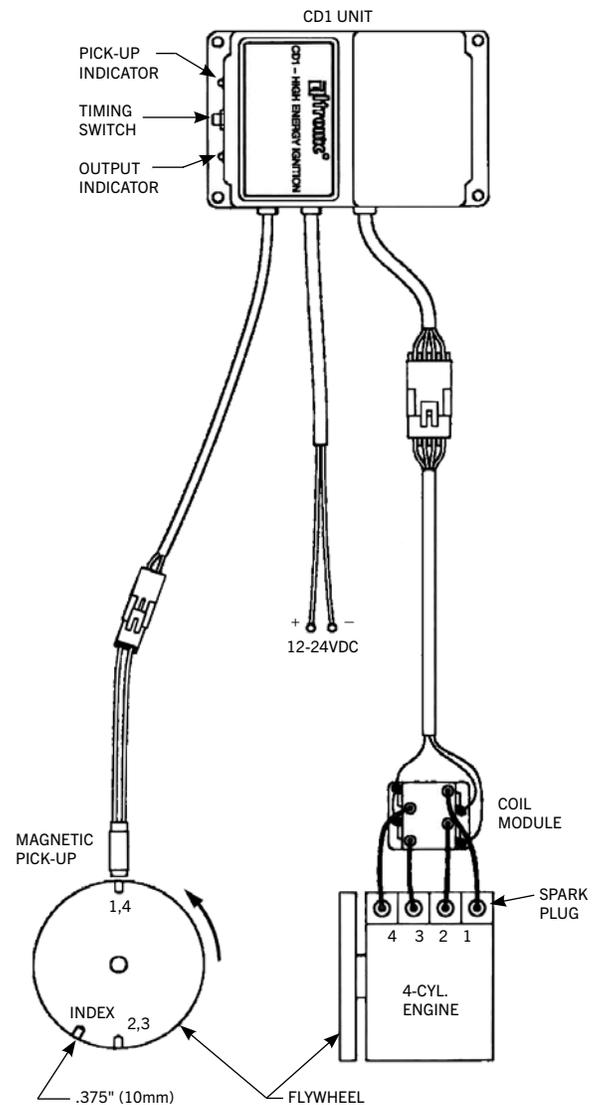

Dimensions

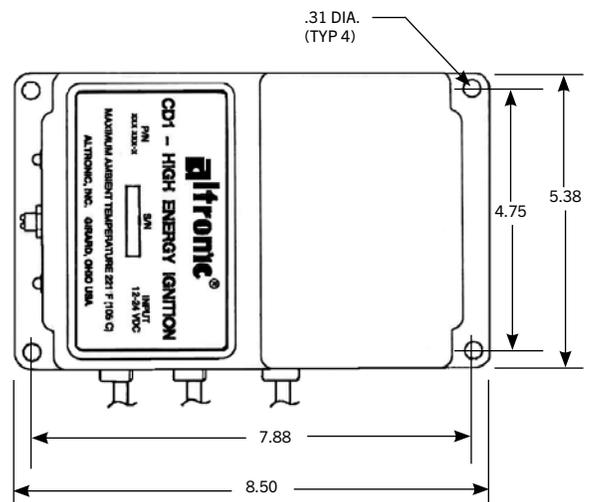

ALTRONIC

A Member of the HOERBIGER Group

712 Trumbull Avenue / Girard, Ohio 44420
 (330) 545-9768 / Fax: (330) 545-9005
 www.altronic-llc.com Email: sales@altronic-llc.com

FORM CD1 8-22 ©2022 Altronic, LLC