

DE-4000 IP Address Instructions

DE-4000 Configurable Safety Shutdown and Control System

*How to change a Windows 10 computer's IP address in order
to hardwire the DE-4000.*

Form DE-4000 IPAI 9-19

altronic


OVERVIEW AND DESCRIPTION

Operating the DE-4000 Series Configurable Safety Shutdown and Control System via a computer running Microsoft Windows 10 requires a temporary change to the computer's IP address. This document outlines the steps necessary to accomplish this. The default IP address for the DE-4000 is 98.102.65.174


NOTE: REMEMBER TO REVERT TO THE COMPUTER'S DEFAULT ADDRESS WHEN DE-4000 OPERATION HAS BEEN COMPLETED.

1.0 CLICK THE WINDOWS ICON


The Windows icon is in the bottom left corner of your computer screen.

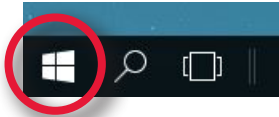


2.0 CLICK ON CONTROL PANEL

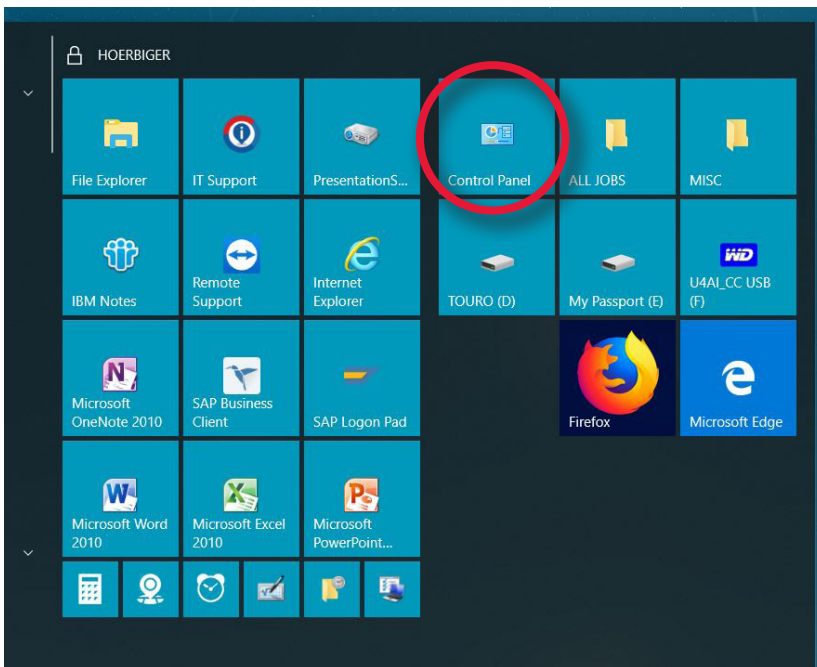


3.0 CLICK ON NETWORK AND SHARING CENTER

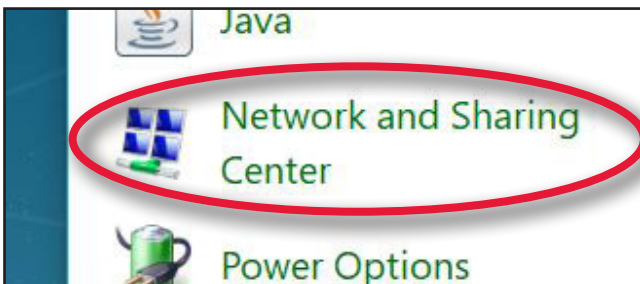

4.0 CLICK ON CHANGE ADAPTER SETTINGS

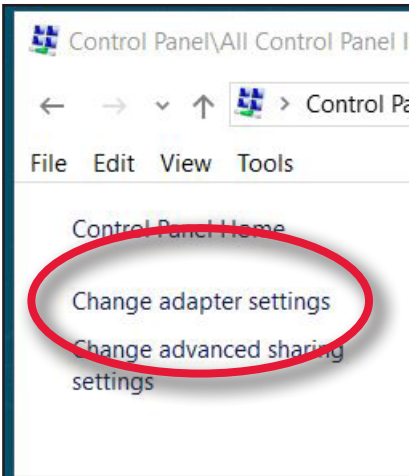


5.0 RIGHT-CLICK ON ETHERNET

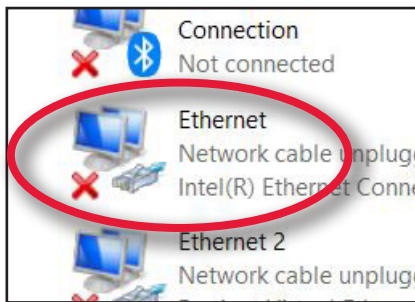


6.0 SELECT PROPERTIES


...from the drop-down menu.

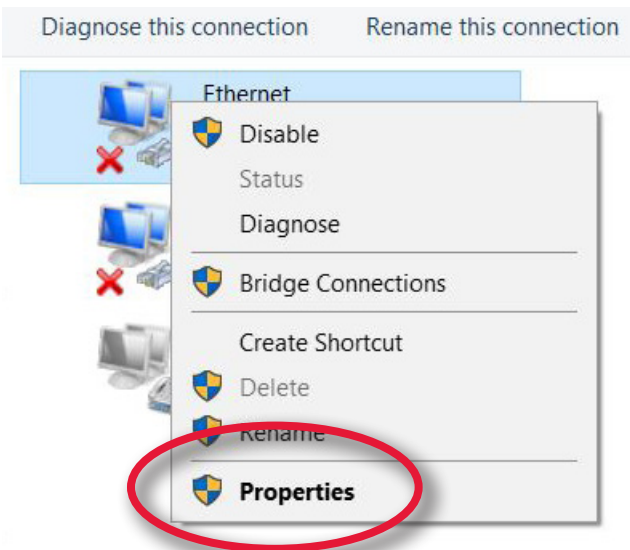

7.0 DOUBLE-CLICK ON INTERNET PROTOCOL VERSION 4 (TCP/IPv4)

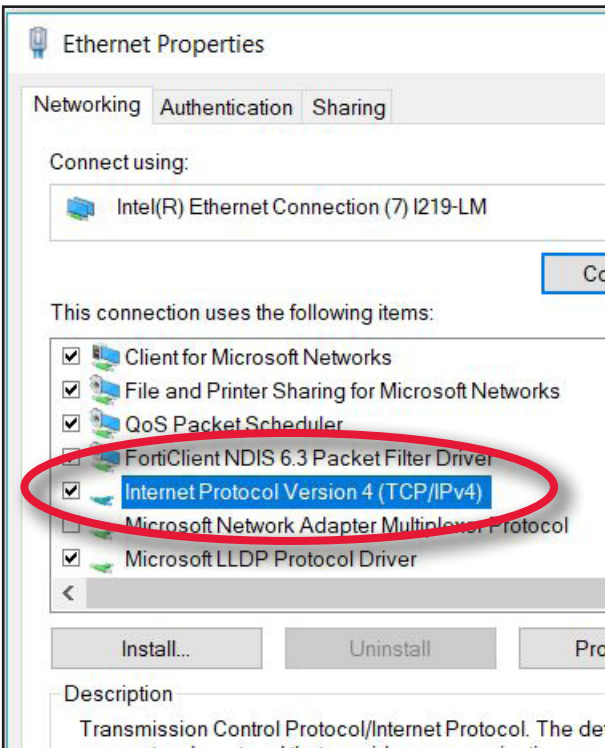

8.0 SELECT USE THE FOLLOWING IP ADDRESS, THEN ENTER THE ADDRESS SHOWN, 98 102 65 200

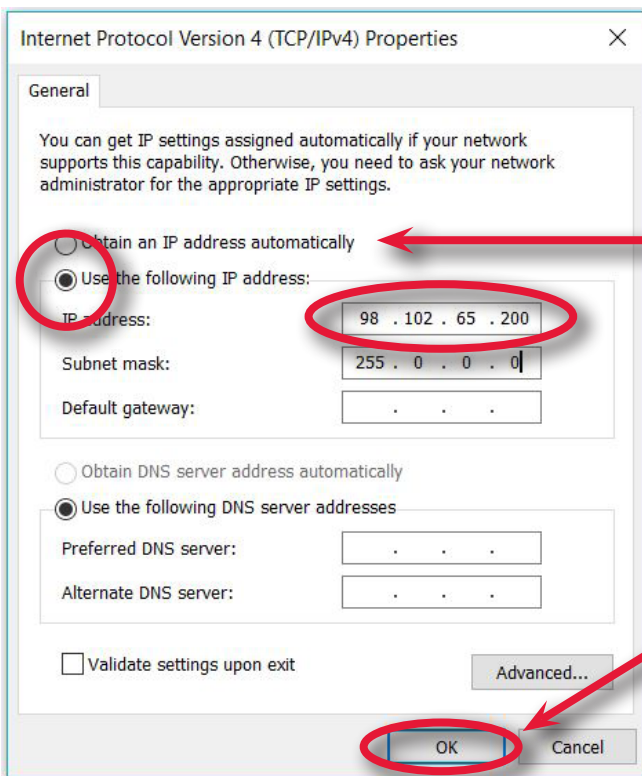

NOTE: TO REVERT TO YOUR COMPUTER'S DEFAULT IP ADDRESS, SELECT "OBTAIN AN IP ADDRESS AUTOMATICALLY" FROM THE PANEL SHOWN HEAR, THEN CLICK ON "OK"..

9.0 CLICK ON OK